


FLOOR PATTERN DETAILS

FINISH MATERIAL ID

SYM	DESCRIPTION	SHEET
	GRID REFLECTS GRAPHIC REPRESENTATION OF INSTALL.	
	GRID CONFIGURATION OF LINES VARY. SPECIFIED TILE SIZE TAKES PRECEDENCE. MATL VARIES.	
F#	FLOOR MATERIAL	A8.1
B#	BASE MATERIAL	A8.1
ST #	STAIR MATERIAL	A8.1
SP #	SPECIALTY MATERIAL	A8.1
G#	GRANITE MATERIAL	A8.1
MT #	METAL TRIM MATERIAL	A8.1
W#	WALL MATERIAL	A8.1
C#	CEILING MATERIAL	A8.1
M#	MILLWORK MATERIAL	A8.1
WS#	WINDOWSILL MATERIAL	A8.1
SM #	SETTING MATERIAL	A8.1

GENERAL FINISH NOTES REFERENCED ON SHEET A8.0

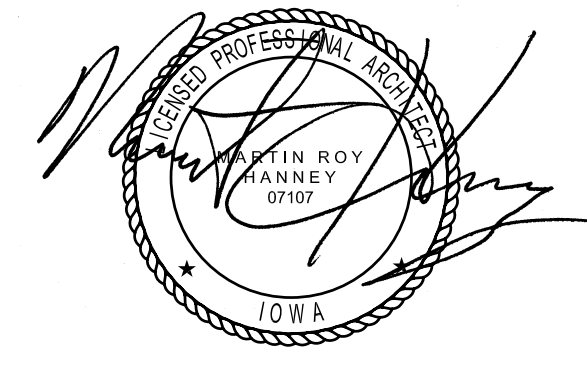

2/20/22
HANNAY & ASSOCIATES, ARCHITECTS
 1728 South Hillside, Wichita, Kansas, 67211
 Phone (316) 883-8965
 Fax (316) 884-1441

2022
GENESIS HEALTH CLUBS
 SOUTHRIDGE MALL
 1111 East Army Post Road
 Des Moines, Iowa 50315




DRAWINGS ISSUED		
NO.	DATE	ITEM ISSUED
10	4/20/22	ADDENDUM #2
11	2/11/22	PERMIT SET
12	1/25/22	CHECK SET
13	12/15/21	CHECK SET
14	9/24/21	CHECK SET
15	8/21/21	SITE PLAN REVIEW
16	7/21/21	UDRB SUBMITTAL
17	7/08/21	MILESTONE DEV. PLAN
18	5/25/21	CONCEPT DEV. PLAN
19	3/20/21	CONCEPT DEV. PLAN


COMPUTER DRAWING
 D:\15_A8.03.dwg

DATE: AUGUST 2021
 DRAWN BY: CHECKED BY:
 MH, CH, TH, TC MRH


SHEET
A8.3
 OF SHEETS

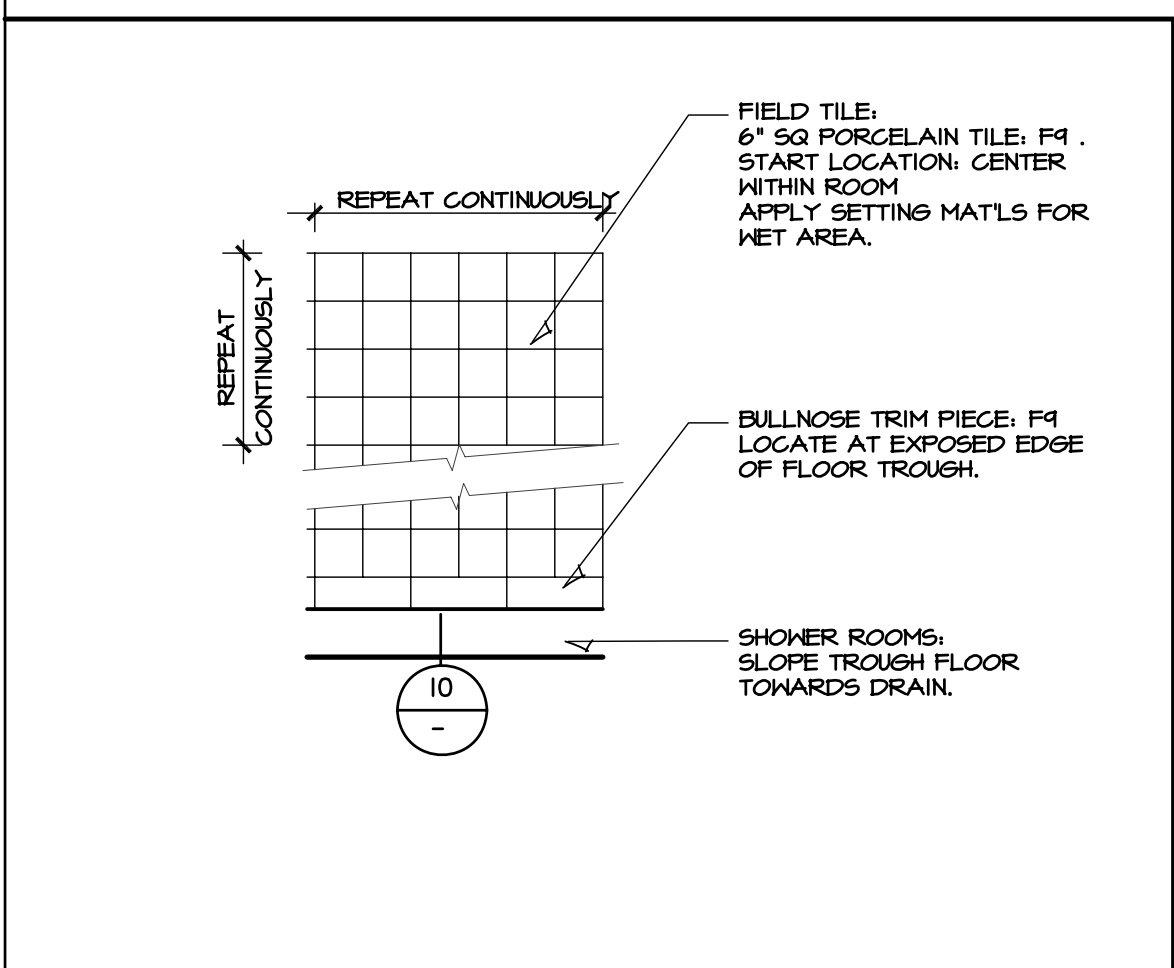


1 SHOWER ROOM: WATER-PROOF. STEAM ROOM: VAPOR & WATER-PROOF KERDI DS MEMBRANE IN STEAM ROOM, KERDI MEMBRANE SHOWER ROOM. REF TO DTL 7 & 8/A8.2. MAINTAIN TCNA INSTALL. GUIDES. FULLY COVER

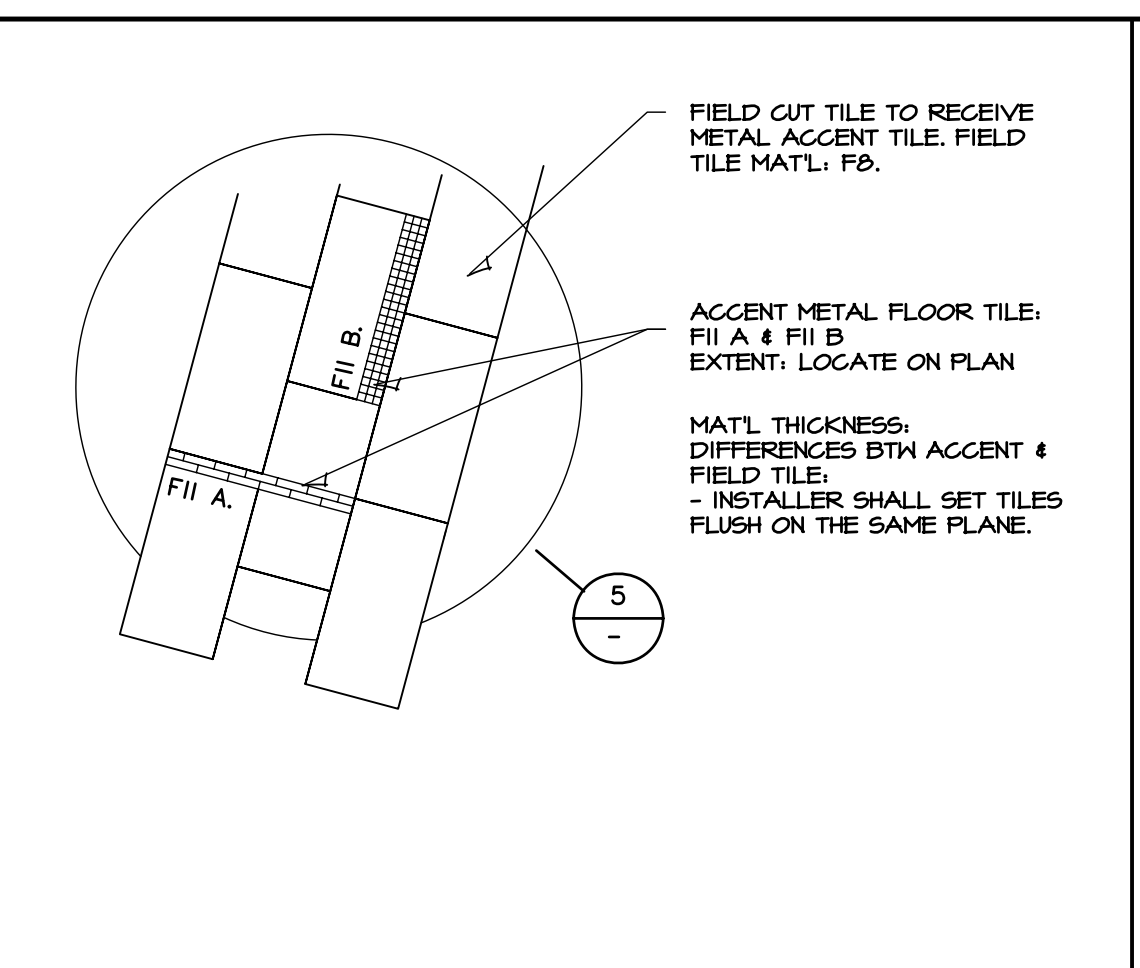


2 LOCKER ROOM ACCENT TILES ANTI-FRACTURE MEMBRANE, TYP. FULL COVERAGE MAINTAIN CURRENT TCNA INSTALL. GUIDELINES

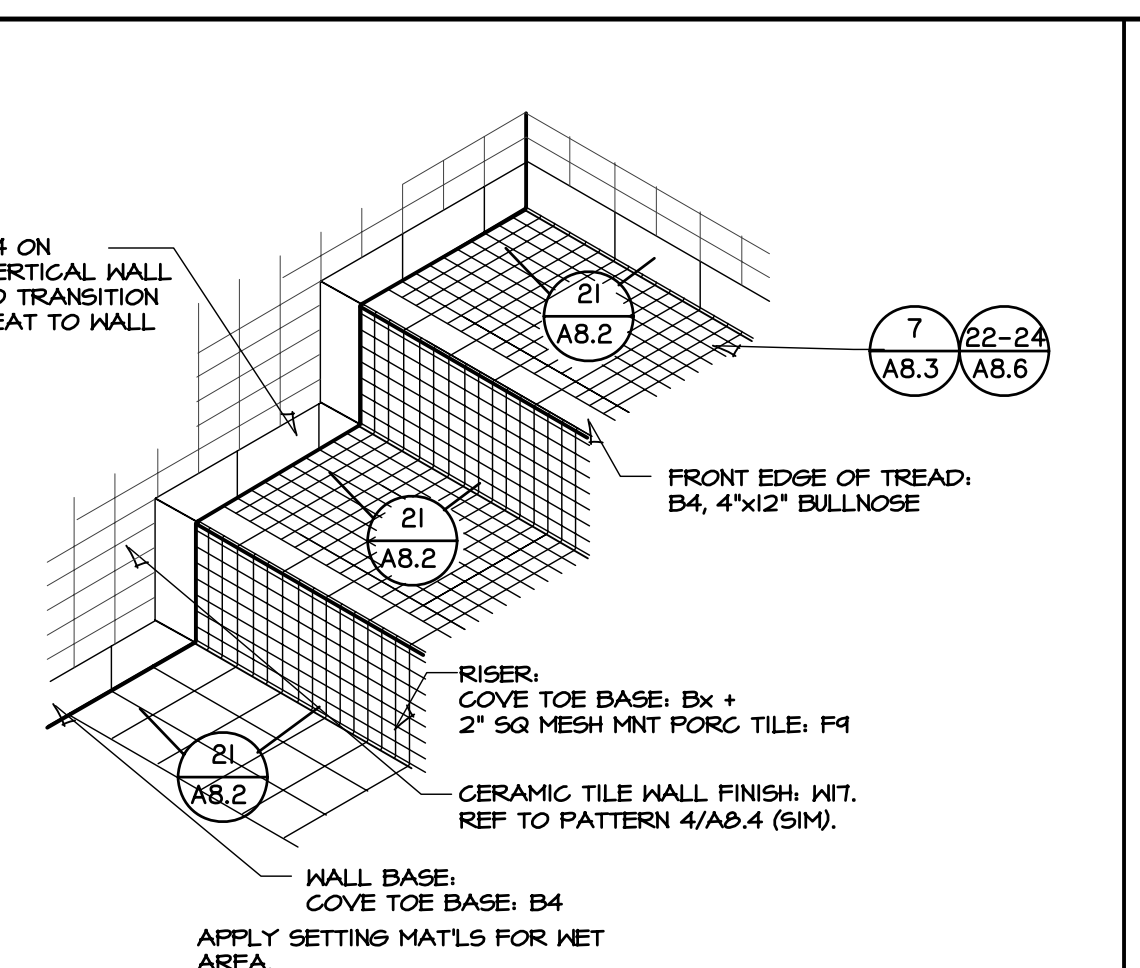

3 STEAM ROOM RISERS KERDI DS WATERPROOF MEMBRANE, REFER TO DTL 6/A8.2AT RISERS. REFER TO DTL 8/A8.0. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES

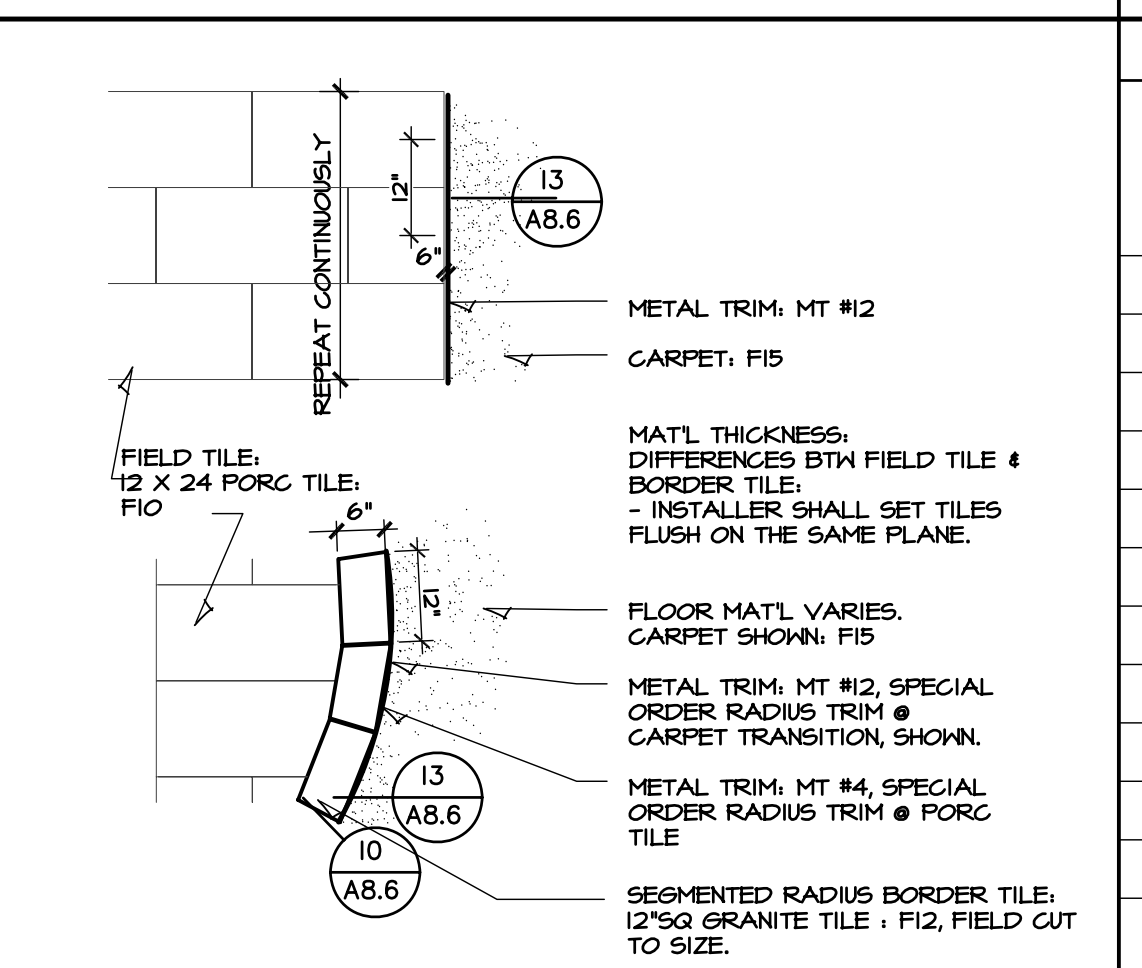


4 TILE BORDER ANTI-FRACTURE MEMBRANE, TYP. REF TO DTL 5/A8.2. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES

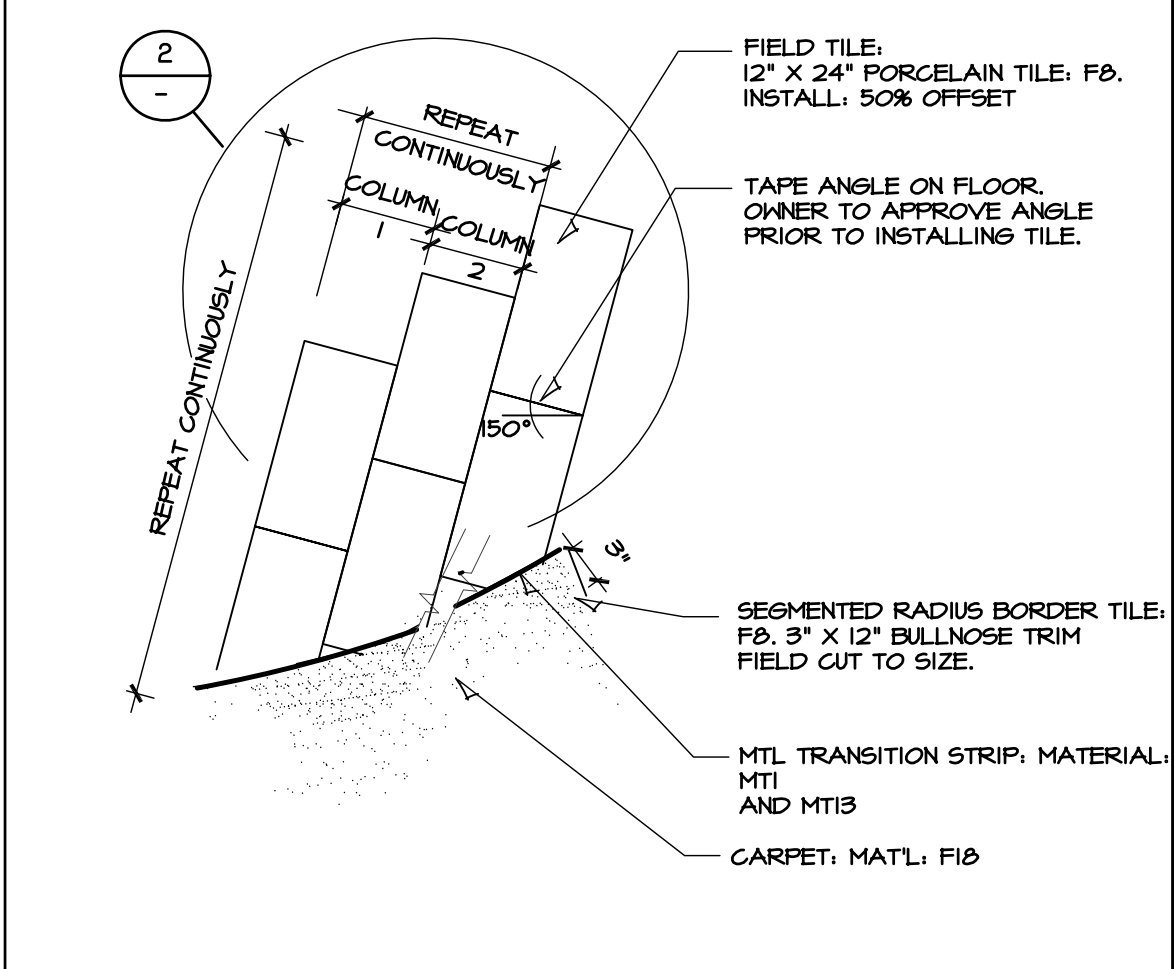

5 LOCKER ROOM ACCENT ANTI-FRACTURE MEMBRANE, TYP. REFER TO DTL 1/A8.2. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES




6 NOT USED

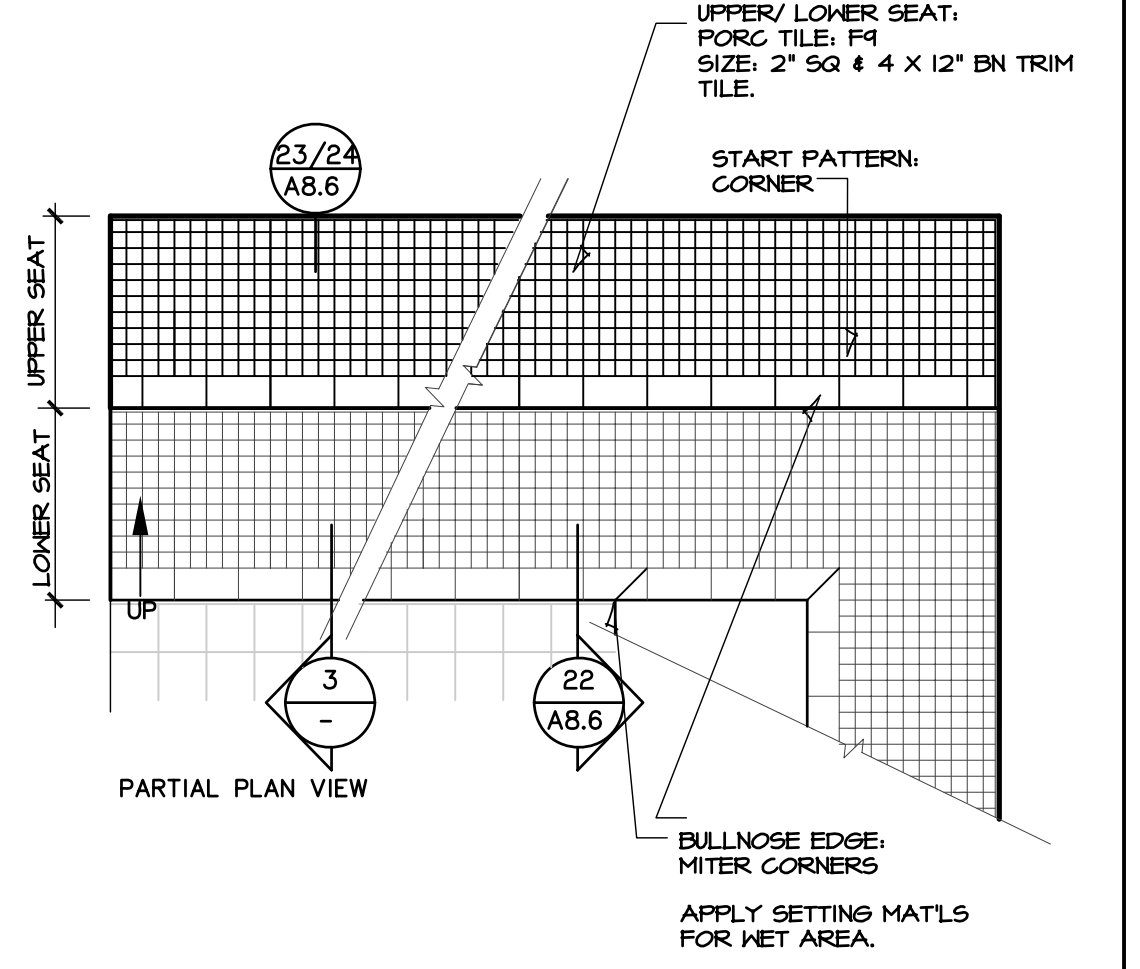


7 STEAM ROOM RISER CORNER KERDI DS WATERPROOF MEMBRANE REFER TO DTL 6/A8.0 AT RISERS. REFER TO DTL 8/A8.2. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES




8 NOT USED

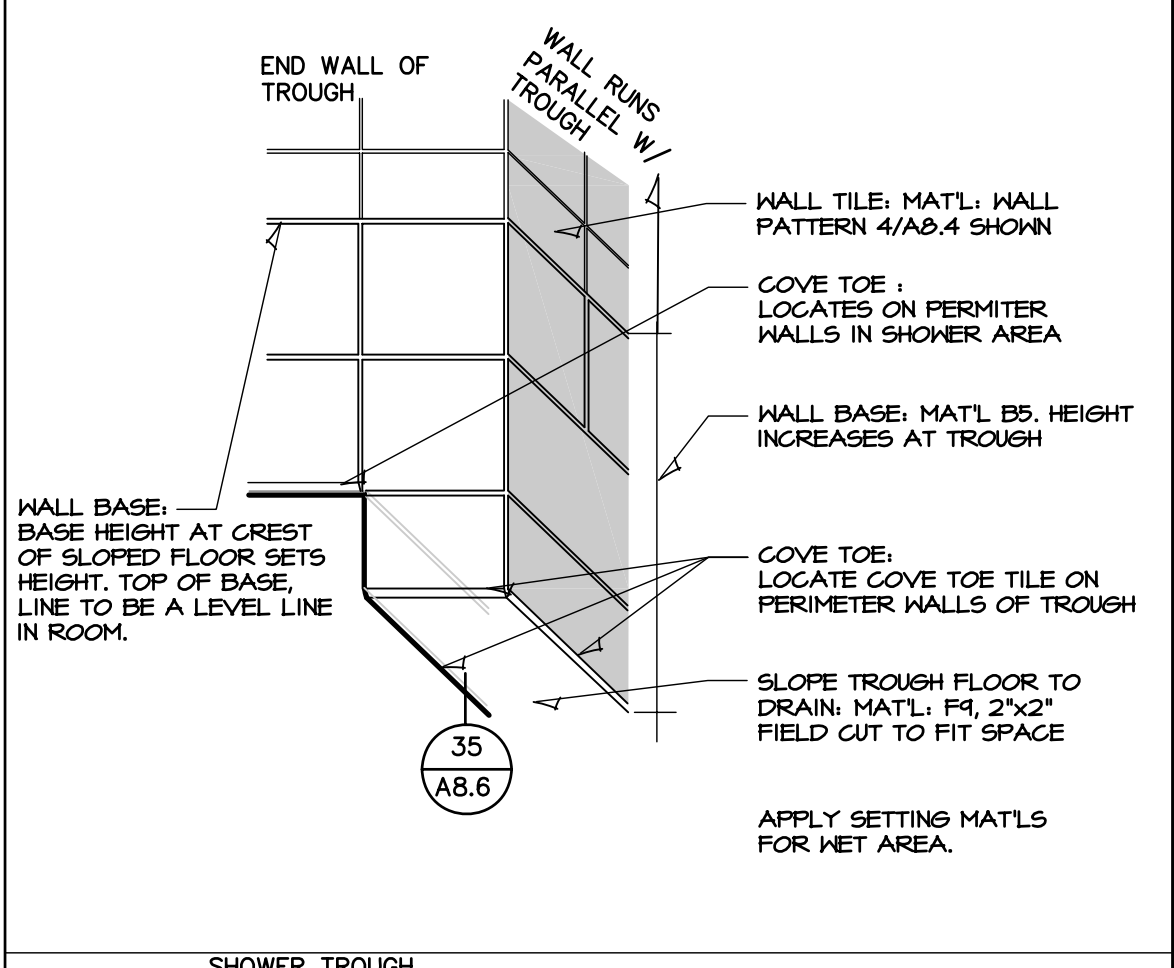


9 SHOWER TROUGH KERDI WATERPROOF MEMB. AT SHOWER REFER TO DTL 7/A8.2. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES

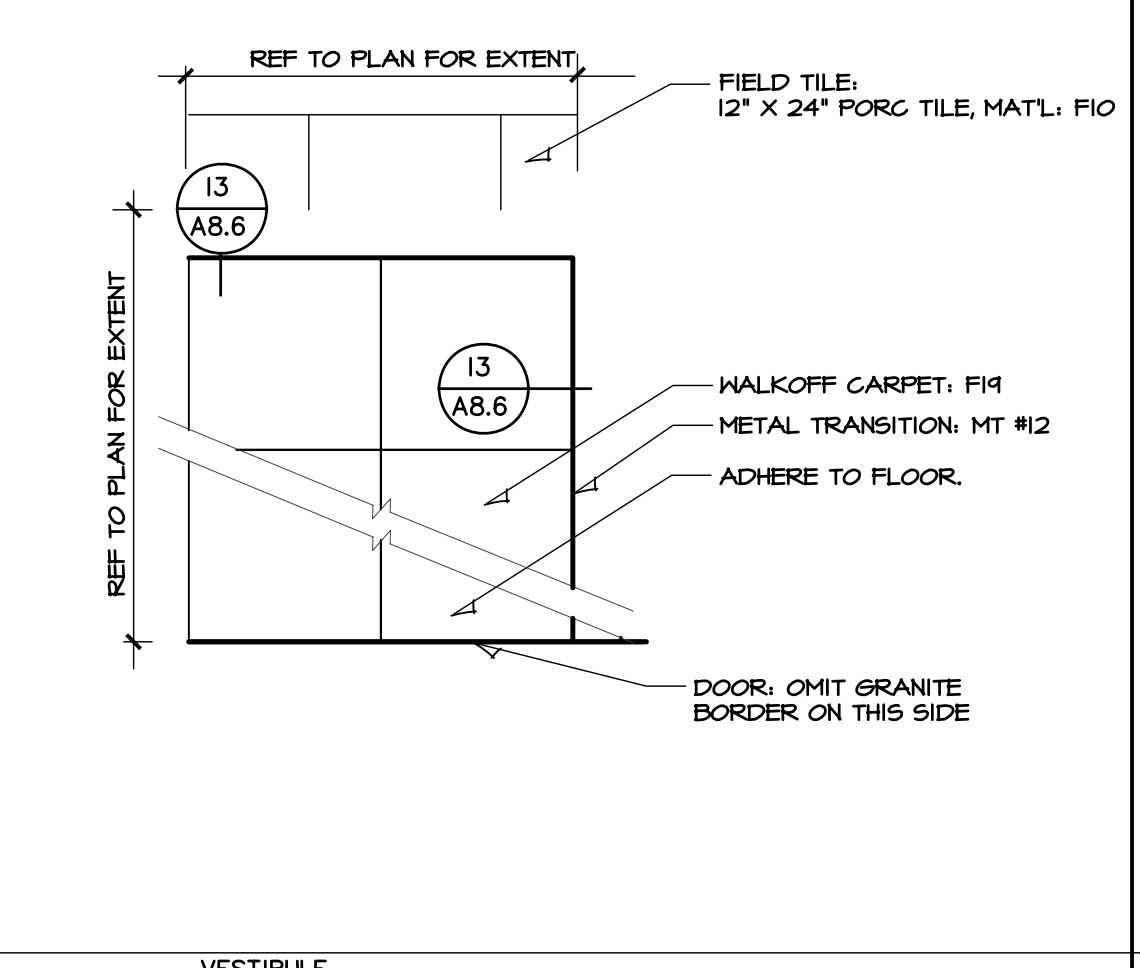


10 VESTIBULE REFER TO DTL 5/A8.2. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES

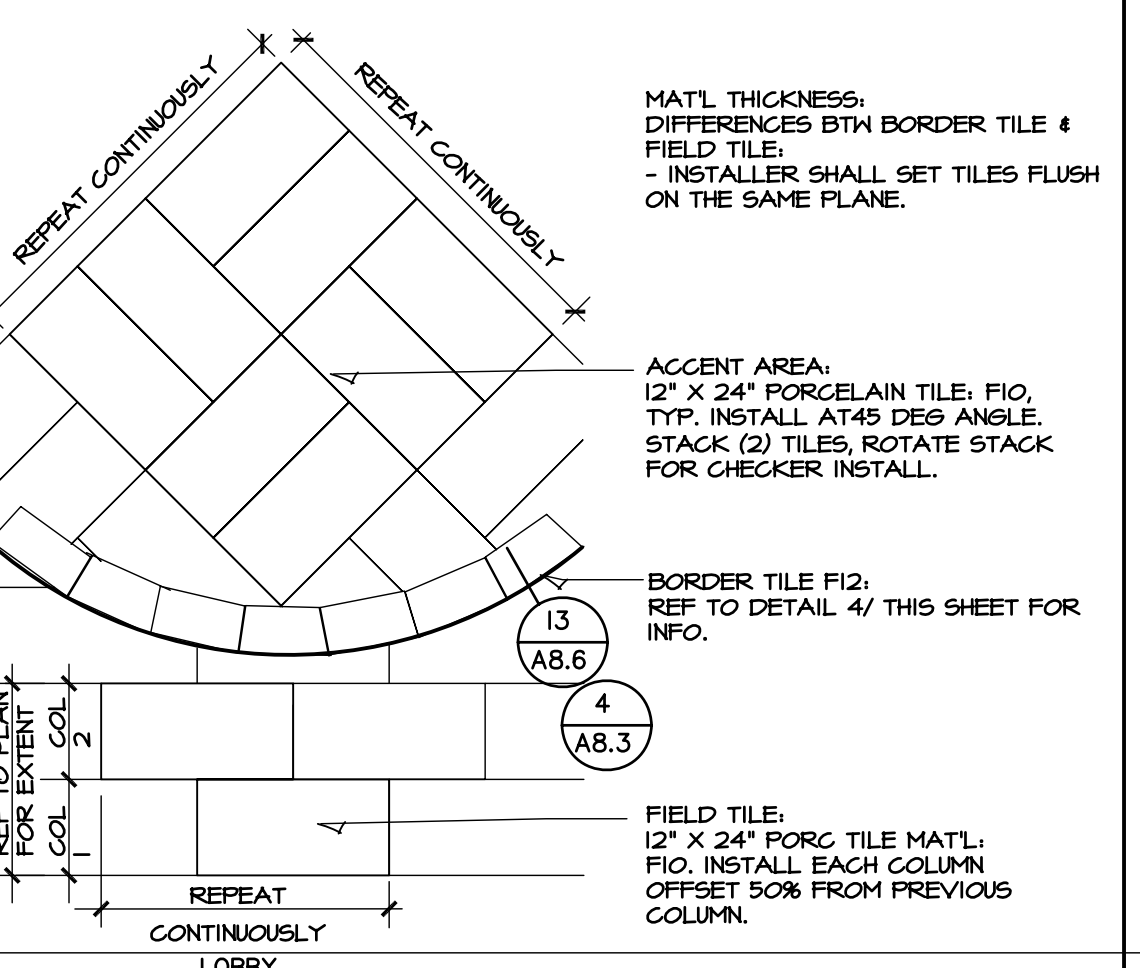


11 LOBBY ANTI-FRACTURE MEMBRANE, TYP. REFERENCE DTL 2/A8.2. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES




12 WOOD FLOORING RAMP DETAIL RAMP SHALL BE FIRMLY ATTACHED TO THE STRUCTURE, & PROPERLY INSTALLED TO PERFORM IT'S INTENDED FUNCTION SAFELY.- BY CONTR

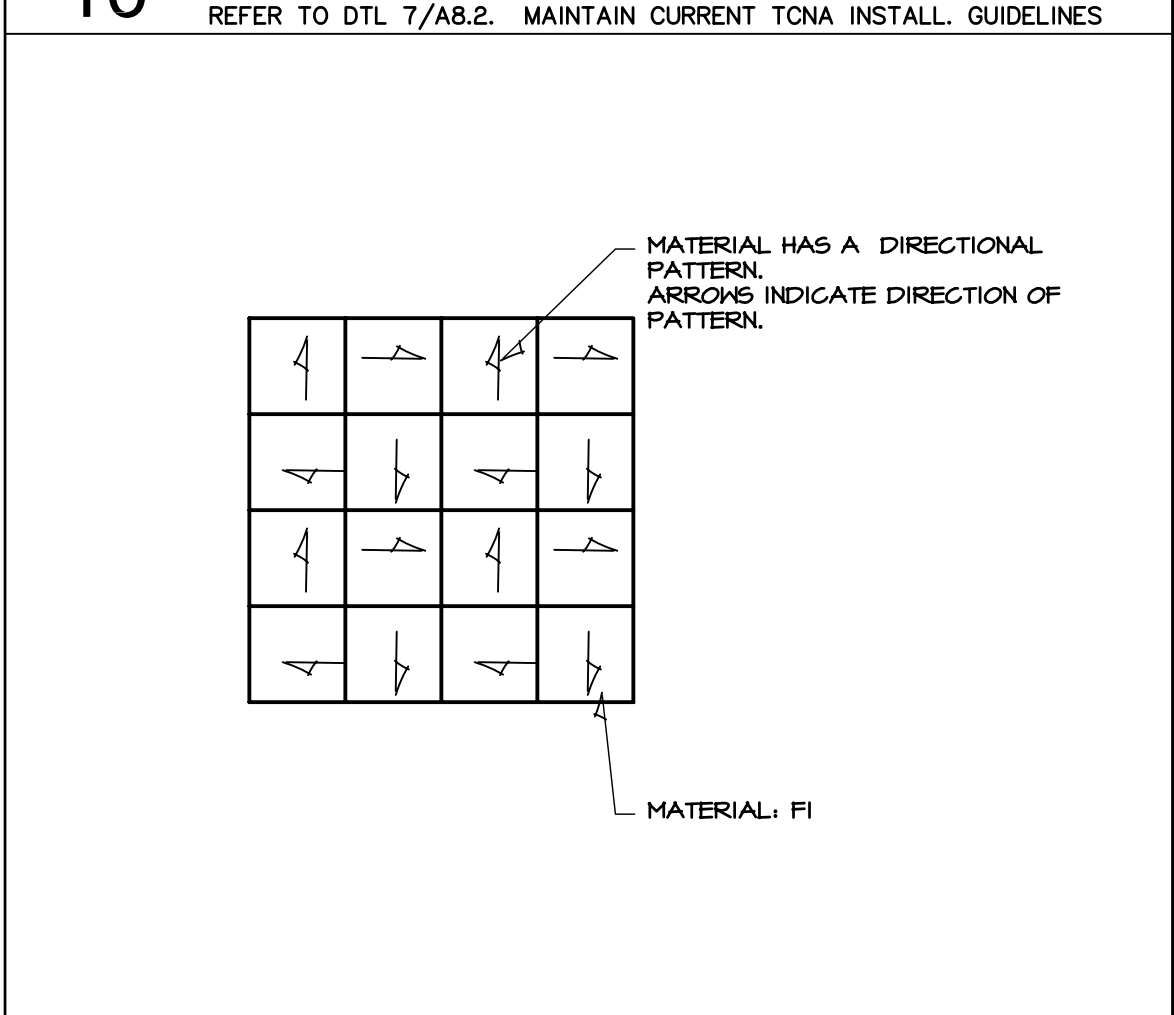


13 VCT TILE ANTI-FRACTURE MEMBRANE FULL COVERAGE

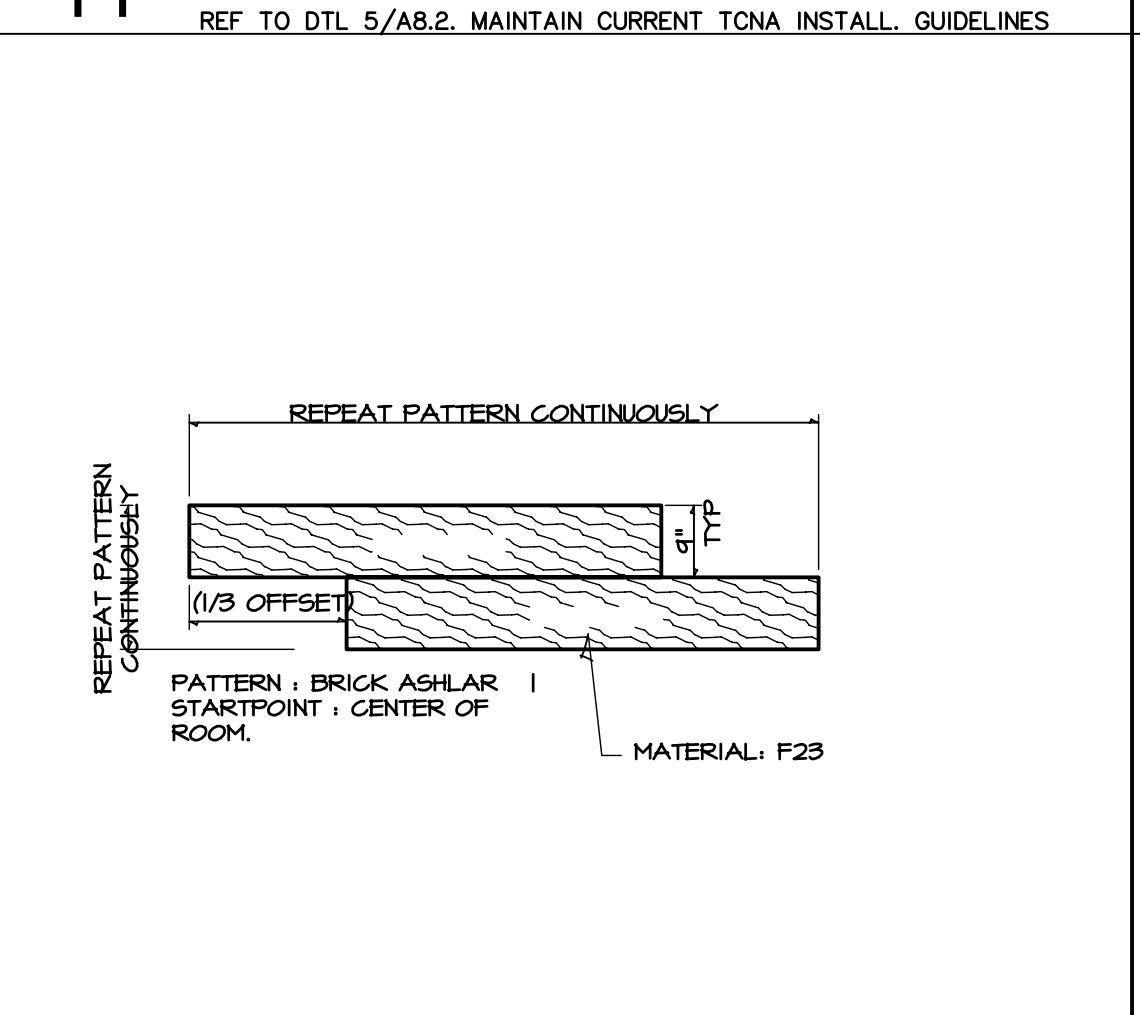

14 LUXURY VINYL PLANKS MEMBRANE CRACK ISOLATION, FULL COVERAGE ADHESIVE DIRECT GLUE, DOUBLE STICK

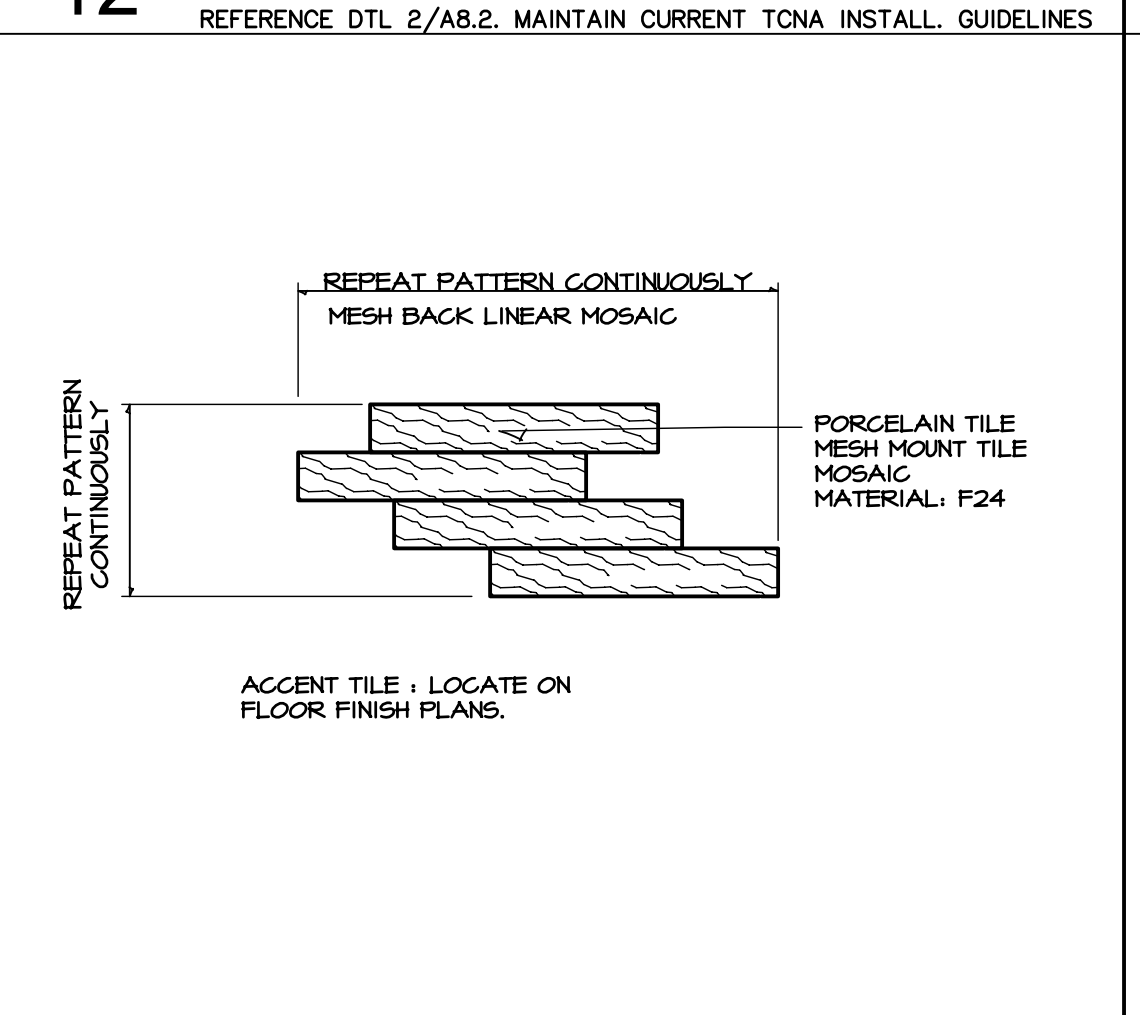

15 TILE BORDER ANTI-FRACTURE MEMBRANE, TYP. REFER TO DTL 5/A8.2. MAINTAIN CURRENT TCNA INSTALL. GUIDELINES



16 NOT USED